

Network Layer

- ❖ Network Layer Services
- ❖ IPv4
- ❖ Internet Routing Protocols: Reliable Transfer

Network Layer Services

Network Layer Functions

- ❖ transport packet from sending to receiving hosts
- ❖ network layer protocols in *every* host, router

Three important functions:

- ❖ *path determination*: route taken from source to destinations. (*Routing algorithms*)
- ❖ *forwarding*: move packets from router’s input to appropriate router output.
- ❖ *call setup*: some network architectures require router call setup along path before data flows.

Network Service Model

Which *service model* for transporting packets from sender to receiver?

- ❖ guaranteed bandwidth?
- ❖ preservation of inter-packet timing (no jitter)?
- ❖ loss-free delivery?
- ❖ in-order delivery?
- ❖ congestion feedback to sender?

The most important abstraction provided by network layer:

Virtual Circuits or Datagrams? Big fight!!!

Virtual Circuit: The Telephone Model

Source-to-Destination path behaves much like a telephone circuit:

- ❖ performance-wise
- ❖ network actions along source-to-destination path

How it works?



- ❖ call setup, teardown for each call *before* data can flow
- ❖ each packet carries VC Identifier (not destination host ID)
- ❖ *every* router on source-destination path keeps *state* for each passing connection

Note: Transport-layer connections only involved in the two end systems.

- ❖ link, router resources (bandwidth, buffers) may be *allocated* to VC to get circuit-like performance.


Signaling Protocols

- ❖ used to setup, maintain, and teardown Virtual Circuit
- ❖ used in ATM, frame-relay, X.25 (*last two obsolete now*)

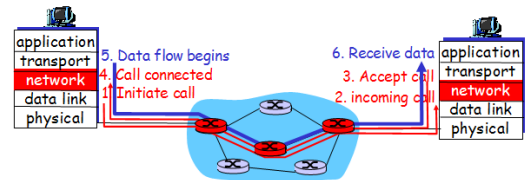

Datagram Network: The Internet Model

- ❖ no call setup at network layer
- ❖ routers: no state about end-to-end connections
 - no network-level concept of “connection”
- ❖ packets forwarded using destination host address
 - packets between same source-destination pair may take different paths

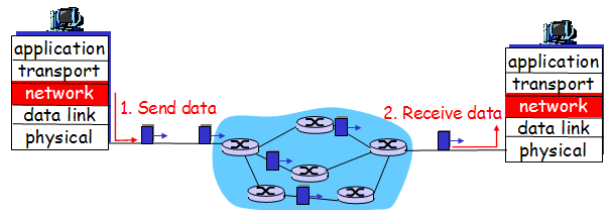

Network Layer Service Model Comparison Chart

Network Architecture	Service Model	Guarantees ?				Congestion feedback
		Bandwidth	Loss	Order	Timing	
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

Datagram v/s VC Network: Why?

Internet:

- ❖ data exchange among computers
“elastic” service, no strict timing requirements.
- ❖ “smart” end systems (computers)
can adapt, perform control, error recovery.
simple inside network, **complexity** at “edge”
- ❖ many link types
different characteristics, thus a uniform service is difficult to achieved.

ATM:

- ❖ evolved from telephony
- ❖ human conversation:
 - strict timing, reliability requirements
 - need for guaranteed service
- ❖ “dumb” end systems
 - telephones
 - **complexity** inside network

Hierarchical Routing

Our routing study has so far been idealized. But this is not true in practice!!! **Why?**

1. All routers are not identical
2. Network is not ‘flat’.

Assume that there are roughly about **200 million** nodes, we obviously cannot store all those destinations in routing tables because routing exchange will saturate links.

Solution: Administrative Autonomy

- ❖ **internet** = network of networks
- ❖ each **network administrator** may want to control routing in its own network


Aggregate routers into regions, “**Autonomous Systems**”

Routers in same **AS** run same routing protocol

- ❖ “**intra-AS**” routing protocol
- ❖ routers in different AS can run different **intra-AS** routing protocol


Gateway/Border Routers

- ❖ special routers in AS
- ❖ run **intra-AS** routing protocol with all other routers in AS
- ❖ **also** responsible for routing to destinations **outside AS**
i.e. run **inter-AS** routing protocol with **other gateway routers**

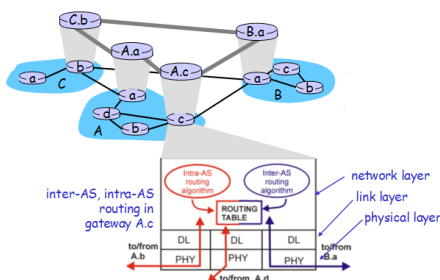

The Internet Protocol (IP) revisited

Network Layer Functions (overview)

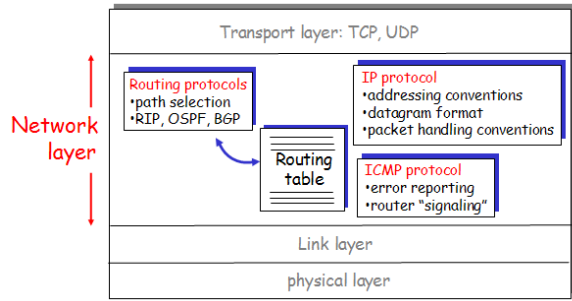

IP Addressing “Class-full” (revisited)

class	network	host	range
A	0		1.0.0.0 to 127.255.255.255
B	10		128.0.0.0 to 191.255.255.255
C	110		192.0.0.0 to 223.255.255.255
D	1110		224.0.0.0 to 239.255.255.255

← 32 bits →

Classless Inter Domain Routing (CIDR)

IP has been extremely successful with its exponential growth, but it is running out of address space. In principle, over 2 billion addresses exist, but in practice millions of them are wasted by classes. For most organizations, class A with 16 million addresses is too big and class C with 256 addresses is too small. A class B network with 65,536 is just right. Studies have shown that more than half of all class has fewer than 50 hosts. Another problem is table explosion. Routers do not have to know about all the hosts, but they know about other networks. Having ½ a million class C networks, every router would require a table with ½ a million entries. The routing table problem can be solved by going to a deeper hierarchy (like telephone), but it requires more than 32-bit for IP addresses. Most solutions solve 1 problem but create new ones. One solution currently being implemented is **Classless Inter Domain Routing**.

The basic idea behind CIDR is to allocate the remaining class C networks (almost 2 million) in variable-sized blocks.

- ❖ If a site needs 2000 addresses, it is given 2048 addresses (8 contiguous class C networks), and not a full class B address.

In addition to using contiguous blocks, the allocation rules were also changed. The world was partitioned into 4 zones.

- ❖ Europe: 194.0.0.0 to 195.255.255.255
- ❖ North America: 198.0.0.0 to 199.255.255.255
- ❖ Central and South America: 200.0.0.0 to 201.255.255.255
- ❖ Asia and Pacific: 202.0.0.0 to 203.255.255.255

Each region was given 32 million addresses, with another 320 million class C addresses from 204.255.255.255 to 223.255.255.255 reserved for future use. Within each block allocate sub-block to ISP. ISP then allocates to customers. Restrict block sizes to powers of 2.

All routers must understand CIDR addressing

Let's see this at work...

How does Host get IP address?

- ❖ Hard-coded by system admin in a file
 - Wintel: control-panel->network->configuration->tcp/ip->properties
 - UNIX: /etc/rc.config file
- ❖ DHCP: Dynamic Host Configuration Protocol: dynamically get address from as server
 - "plug-and-play" (more later)

How does an ISP get block of addresses?


- ❖ ICANN: Internet Corporation for Assigned Names and Numbers
 - allocates addresses
 - manages DNS
 - assigns domain names, resolves disputes

Getting a datagram from Source to Destination

IP datagram:

misc fields	source IP addr	dest IP addr	data
-------------	----------------	--------------	------

- datagram remains **unchanged**, as it travels source to destination
- addr fields of interest here

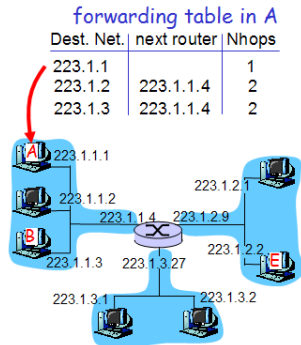


Case 1

misc fields	223.1.1.1	223.1.1.3	data
-------------	-----------	-----------	------

Starting at A, send IP datagram addressed to B:

- look up net. address of B in forwarding table
- find B is on same net. as A
- link layer will send datagram directly to B inside link-layer frame
 - B and A are directly connected

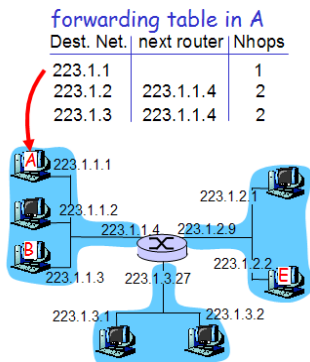

Case 2


misc fields	223.1.1.1	223.1.2.3	data
-------------	-----------	-----------	------

Starting at A, dest. E:

- look up network address of E in forwarding table
- E on *different* network
 - A, E not directly attached
- routing table: next hop router to E is 223.1.1.4
- link layer sends datagram to router 223.1.1.4 inside link-layer frame
- datagram arrives at 223.1.1.4
- continued....

forwarding table in A

Dest. Net.	next router	Nhops
223.1.1		1
223.1.2	223.1.1.4	2
223.1.3	223.1.1.4	2



Case 3


misc fields	223.1.1.1	223.1.2.3	data
-------------	-----------	-----------	------

Arriving at 223.1.4, destined for 223.1.2.2

- look up network address of E in router's forwarding table
- E on *same* network as router's interface 223.1.2.9
 - router, E directly attached
- link layer sends datagram to 223.1.2.2 inside link-layer frame via interface 223.1.2.9
- datagram arrives at 223.1.2.2!!! (hooray!)

forwarding table in router

Dest. Net.	router	Nhops	interface
223.1.1	-	1	223.1.1.4
223.1.2	-	1	223.1.2.9
223.1.3	-	1	223.1.3.2



IP Datagram Format (revisited)

